

**DS-K1109DB  
Card Reader**

- Supports RS-485 and Wiegand (W26, W34) protocol
- Supports reading DESfire card, Felica card and M1 card
- Supports authentication via card
- Supports bluetooth module
- Tamper-proof function


## ▪ Specification

| Interface           |                                                  |
|---------------------|--------------------------------------------------|
| TAMPER              | 1                                                |
| RS-485              | 1                                                |
| Wiegand             | 1                                                |
| Authentication      |                                                  |
| Card type           | M1 card, DESfire card, Felica card               |
| General             |                                                  |
| Power supply        | 12 VDC                                           |
| Power consumption   | With load: ≤ 14 w<br>Without load: ≤ 4 w         |
| Working temperature | -40 °C to 65 °C (-40 °F to 149 °F)               |
| Working humidity    | 0 to 90% (no condensing)                         |
| Protective level    | IP65                                             |
| Dimensions          | 125 mm × 84.5 mm × 18 mm (4.92" × 3.33" × 0.71") |
| Installation        | Wall mounting                                    |
| Weight              | ≤ 1 kg (2.20 lb)                                 |
| Buzzer              | Support                                          |

## ▪ Available Model

DS-K1109DB

## ▪ Dimension

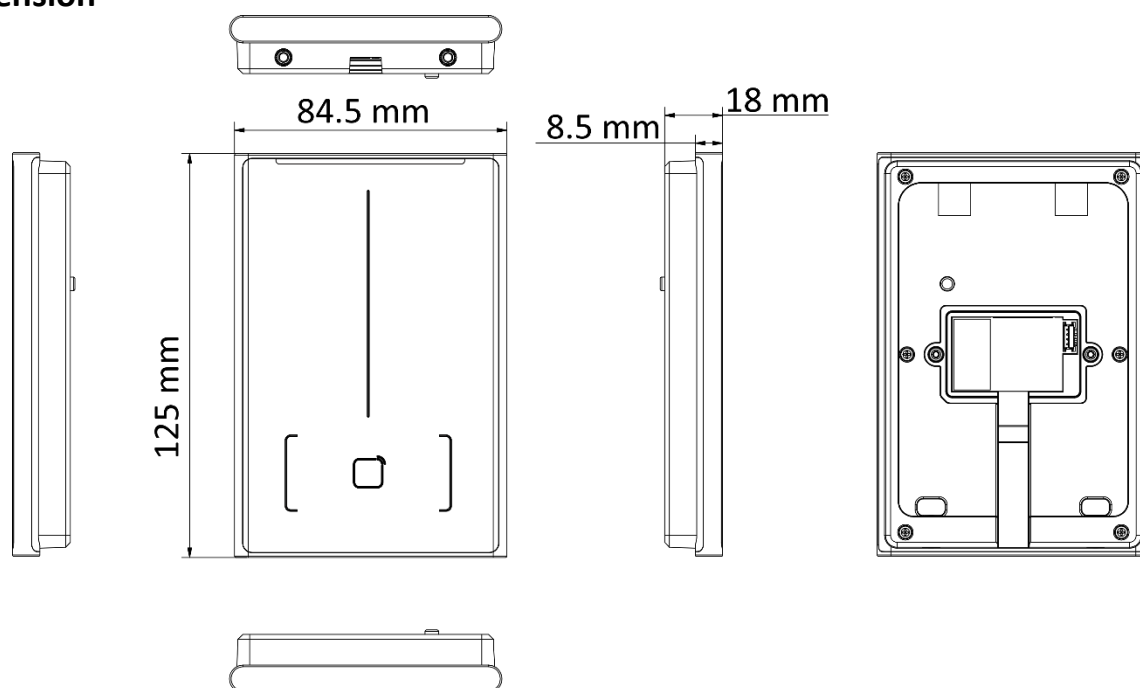

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq