DS-TME200-D(K)/P
Entrance & Exit Controller




- Supports Entrance & Exit management of 4 lanes.
- TCP/IP network communication, with self-adaptive network interface. The communication data is encrypted to ensure information security.
- Supports 4 Wiegand interface for accessing card reader. Wiegand interface supports W26/ W34 （If need to connect with other non-UHF readers, please confirm with the headquarters in advance）.
- Massive storage with 100, 000 cards information and 100,000 card swiping records. Supports various card types such as normal/blocklist/Registered
- Supports 4 alarm output interface for controlling up to 4 barrier gates.
- Supports online and offline operating mode.
- Supports time synchronization via NTP, manual or automatic method

▪ Specification

Network	
Interface Protocol	TCP/IP
Interface	
Relay Output	4
Alarm Input	4
Wiegand	4*W26/34
RS-232	1
RS-485	1
USB	1*USB2.0
Network	1*10M/100M self-adaption
General	
Working Temperature and Humidity	-20℃ ~50℃ (-4℉ ~122℉) 10% ~ 95%
Power Supply	220V AC by default, 110V AC requires set on power switch
Power Consumption	20W (5 W without load)
Dimensions	467 × 350 × 190.6 mm (18.39 × 13.78 × 7.5 inch)
Weight	4 kg (4.40 lb.)
Weight (with Package)	5 kg (5.50 lb.)
Dimensions (with Package)	500 x 420 x 290 mm (19.69 × 16.54 × 11.42 inch)
Operating System	Embedded Linux System

▪ Dimension

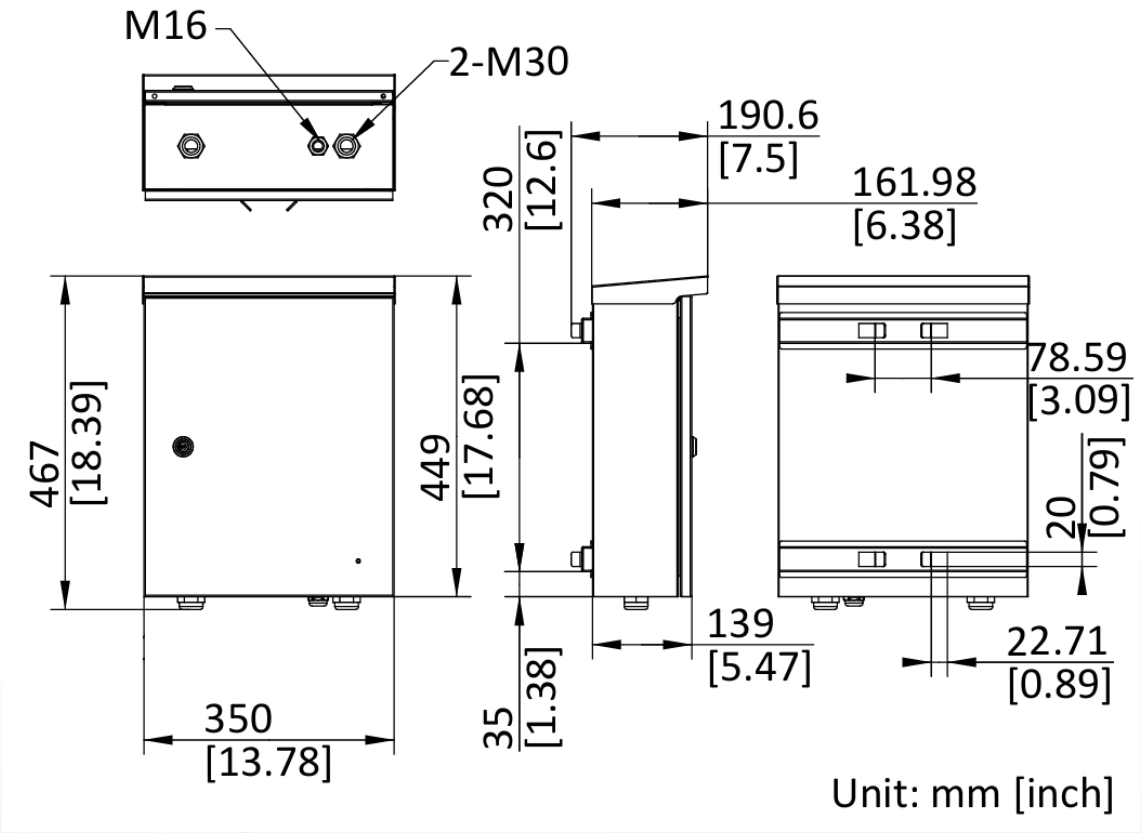

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®