

## DS-K2622X(P) Pro Series Access Controller



- Supports 2-door control
- Supports IPv4, IPv6 and DHCP
- Supports AES256, RSA2048, and TLS 1.2 encryption protocols
- Web configuration management. All configurations can be realized via web without software application
- Supports professional access control applications such as multi-door interlocking and anti-passback
- Supports backup battery access
- Supports OSDP, and a variety of wiegand formats to connect to third-party card readers
- It has status indicators such as power supply, communication and operation, which is convenient for equipment health detection

## ▪ Specification


| System                           |                                                                                                                                                                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating system                 | Linux                                                                                                                                                                                                                                                                  |
| ROM                              | 4 GB                                                                                                                                                                                                                                                                   |
| RAM                              | 128 MB                                                                                                                                                                                                                                                                 |
| Network                          |                                                                                                                                                                                                                                                                        |
| Network protocol                 | ISAPI,Hik-Connect,ISUP5.0                                                                                                                                                                                                                                              |
| Wired network                    | 10/100 Mbps self adaptive                                                                                                                                                                                                                                              |
| Interface                        |                                                                                                                                                                                                                                                                        |
| Network interface                | 1                                                                                                                                                                                                                                                                      |
| Lock control                     | 2                                                                                                                                                                                                                                                                      |
| Exit button                      | 2                                                                                                                                                                                                                                                                      |
| Door contact input               | 2                                                                                                                                                                                                                                                                      |
| Alarm input                      | 4                                                                                                                                                                                                                                                                      |
| Alarm output                     | 4                                                                                                                                                                                                                                                                      |
| TAMPER                           | 1                                                                                                                                                                                                                                                                      |
| RS-485                           | 2 for card reader (1 for communication, 1 for redundancy; each interface can connect up to 4 readers)                                                                                                                                                                  |
| Wiegand                          | 4, standard 26/34 input, supports custom Wiegand settings                                                                                                                                                                                                              |
| Fire interface                   | Support                                                                                                                                                                                                                                                                |
| Capacity                         |                                                                                                                                                                                                                                                                        |
| User capacity                    | 100000                                                                                                                                                                                                                                                                 |
| Fingerprint capacity             | 10000                                                                                                                                                                                                                                                                  |
| Card capacity                    | 100000                                                                                                                                                                                                                                                                 |
| Event capacity                   | 300000                                                                                                                                                                                                                                                                 |
| Linked door capacity             | 2                                                                                                                                                                                                                                                                      |
| Linked card reader capacity      | 4 RS-485 card readers (OSDP protocol) and 4 Wiegand card readers                                                                                                                                                                                                       |
| Authentication                   |                                                                                                                                                                                                                                                                        |
| Fingerprint recognition duration | < 1 s                                                                                                                                                                                                                                                                  |
| General                          |                                                                                                                                                                                                                                                                        |
| Indicator                        | Support                                                                                                                                                                                                                                                                |
| Battery                          | Charge and discharge                                                                                                                                                                                                                                                   |
| Power supply                     | 12 ± 15% VDC                                                                                                                                                                                                                                                           |
| Power consumption                | ≤ 72 W                                                                                                                                                                                                                                                                 |
| Working temperature              | -10 °C to 55 °C (14 °F to 131 °F)                                                                                                                                                                                                                                      |
| Working humidity                 | 0% to 90% (No condensing)                                                                                                                                                                                                                                              |
| Installation                     | Wall mounting                                                                                                                                                                                                                                                          |
| Language                         | English, Thai, Traditional Chinese, Indonesian, Vietnamese, Arabic, Spanish (Europe), Spanish (South America), Italian, French, Dutch, Russian, Ukrainian, Portuguese (Europe), Portuguese (Brazil), Serbian, Croatian, Bulgarian, German, Greek, Romanian and Turkish |
| Function                         |                                                                                                                                                                                                                                                                        |
| Configuration via Web browser    | Support                                                                                                                                                                                                                                                                |
| Hik-Connect                      | Support                                                                                                                                                                                                                                                                |
| HikCentral Professional          | Support                                                                                                                                                                                                                                                                |

|                             |         |
|-----------------------------|---------|
| HikCentral Connect          | Support |
| Hik-Partner Pro             | Support |
| Multi-factor authentication | Support |
| First person in             | Support |
| Anti-passback               | Support |
| Multi-door interlocking     | Support |

## ▪ Available Model

DS-K2622X(P)

## ▪ Dimension

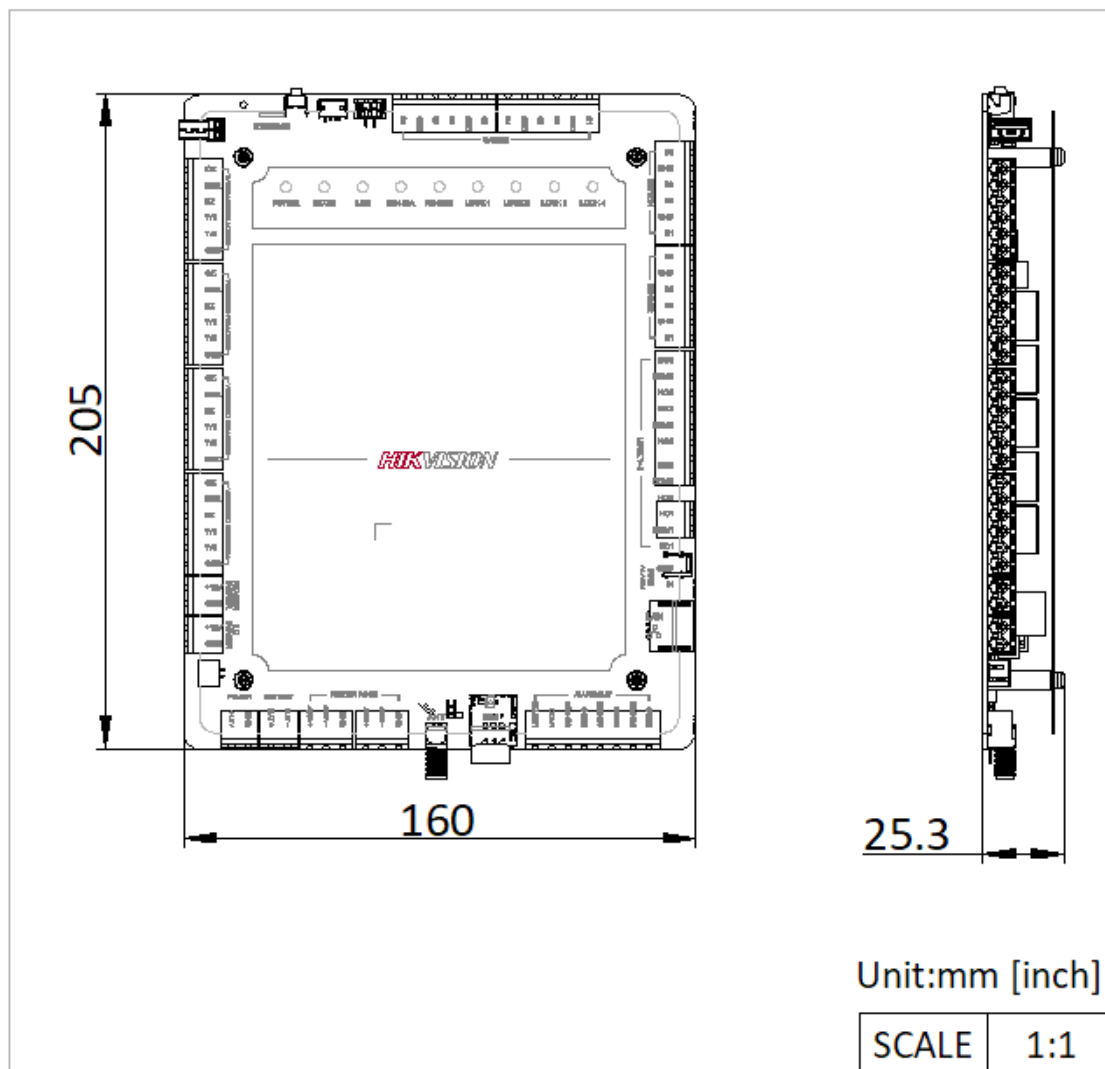

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq