DS-K1105EMKB
Pro Card Reader



- Supports RS-485 protocol, Wiegand (W26/W34) protocol, and OSDP protocol
- Build-in M1 and EM card reading module (Frequency: 13.56 MHz&125 KHz)
- Built-in buzzer for identifying the reading status
- Supports online upgrade
- Supports multiple authentication methods such as card swiping, PIN, bluetooth, etc
- Supports touch panel for operation
- Supports occlusion detection, with bluetooth, it can realize door open via waving hands

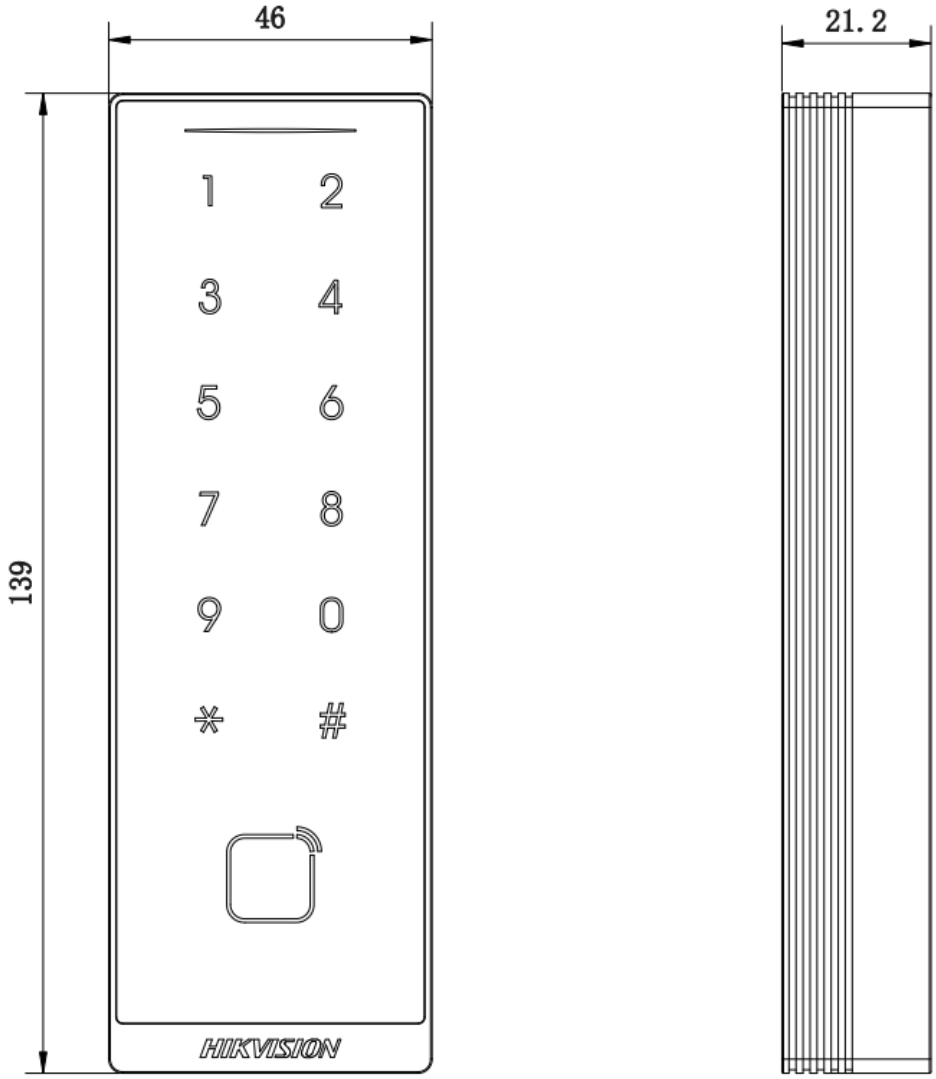
▪ Specification

Interface	
RS-485	Support
Wiegand	Support
Authentication	
Card type	EM card,M1 card
General	
Power supply	12 VDC
Power consumption	≤6W
Working temperature	-40 ~65℃
Working humidity	0%--90%
Protective level	IP66
Dimensions	139×46×21.2mm（5.47×1.81×0.83inch）
Installation	Wall mounting
Weight	167.7g
Buzzer	Support

▪ Available Model

DS-K1105EMKB

▪ Dimension


46
21.2
139
1
2
3
4
5
6
7
8
9
0
*
#
HIKVISION

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®