# PFA7753

## General Others Bracket

- Sleek design.

## Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

## Ordering Information

| Type | Model | Description |
|---|---|---|
| Bracket | PFA7753 | General Others Bracket |
| Accessories (Optional) | PFM900-E | Integrated Mount Tester |

## Technical Specification

### Structure

| | |
|---|---|
| Casing Material | Plastic |
| Product Dimensions | 130.2 mm × 54.0 mm × 33.0 mm (5.13" × 2.13" × 1.30") (L × W × H) |
| Net Weight | 22 g (0.05 lb) |
| Gross Weight | 36 g (0.08 lb) |
| Installation | Wall mount (surface-mounted waterproof bracket) |
| Packaging Dimensions | 148.0 mm × 59.5 mm × 38.5 mm (5.83" × 2.34" × 1.52") (L × W × H) |

### Environment

| | |
|---|---|
| Operating Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |
| Operating Humidity | 10%–90% (RH), non-condensing |
| Storage Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |
| Storage Humidity | 10%–90% (RH), non-condensing |
| Anti-corrosion Level | Basic Protection |

## Dimensions (mm[inch])

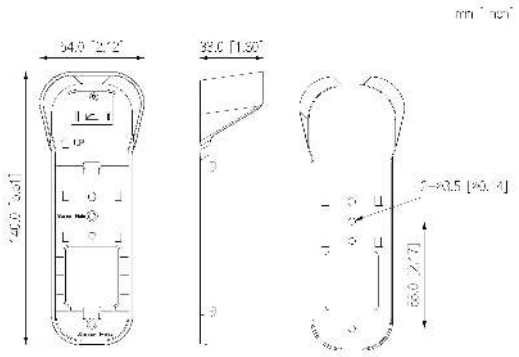



© 2025 Dahua. All rights reserved. Design and specificatons are subject to change without notce.
Pictures in the document are for reference only, and the actual product shall prevail.