


Network Video Recorder G2 Pro

UNVR-G2-Pro

Datasheet | In The Box | Marketing Images | Accessories | Installation Guide




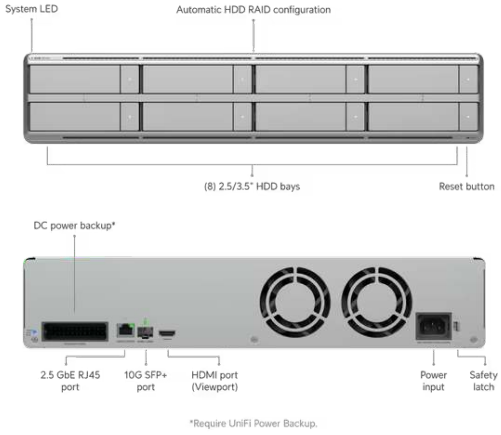

Overview

Dimensions	442.4 x 87.4 x 325 mm (17.4 x 3.4 x 12.8")
Managed Cameras	(100) HD (70) 2K (50) 4K
Max. Simultaneous Viewport Streams	16 4K cameras
Managed Access Hubs	150+
Storage Capacity	(8) 2.5/3.5" drive bays
Data Protection	✓
Networking Interface	(1) 10G SFP+ port (1) 2.5 GbE RJ45 port
Power Redundancy	✓
Form Factor	Rack Mount (2U)
Door Access Support	✓
Management Application	UniFi Protect UniFi Access UniFi Connect

Hardware

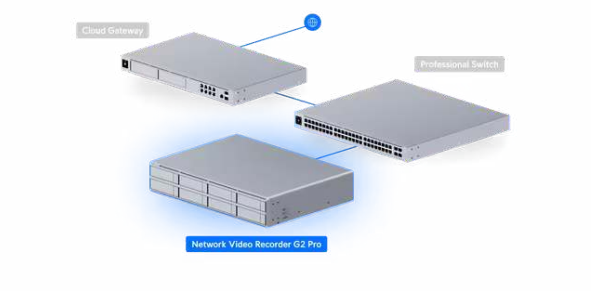

Hard Drive Capacity	(8) 2.5/3.5" HDD / SSD support
Max. Power Budget for Drives	155W
Max. Power Consumption	200W
Power Method	(1) Universal AC input, 100-240V AC, 3A Max., 50/60 Hz (1) USP-RPS DC input, 11.5V DC
Power Supply	AC/DC, Internal PSU, 200W
Processor	Qualcomm® Kryo™ CPU built on Arm® Cortex® technology (4 nm) (1) Prime core (3.2 GHz) (4) Performance cores (2.8 GHz) (3) Efficiency cores (2.0 GHz)
Memory	16 GB
Management	Ethernet Bluetooth
Weight	8.4 kg (18.5 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
LEDs	
— Ethernet	✓
— SFP+	✓
— RPS	✓
— HDD	✓
— System	✓
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

Software

Application Requirements

UniFi Protect	Version 7.1.55 or later.
UniFi Access	Version 4.2.16 or later.